



# AD EUROINOX - AUTOMATIC INVERTER DRIVEN PRESSURISATION SYSTEM FOR DOMESTIC WATER SUPPLY

Liquid temperature range pumped: from 0 °C to +35 °C - Maximum ambient temperature: +40°C

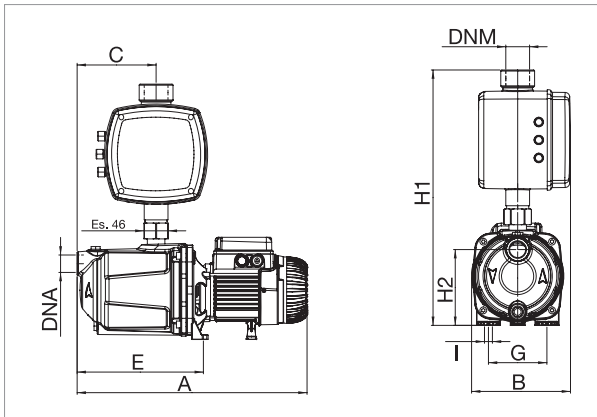

The performance curves are based on the kinematic viscosity values = 1 mm<sup>2</sup>/s and density equivalent to 1000 kg/m<sup>3</sup>. Curve tolerance according to ISO 9906.

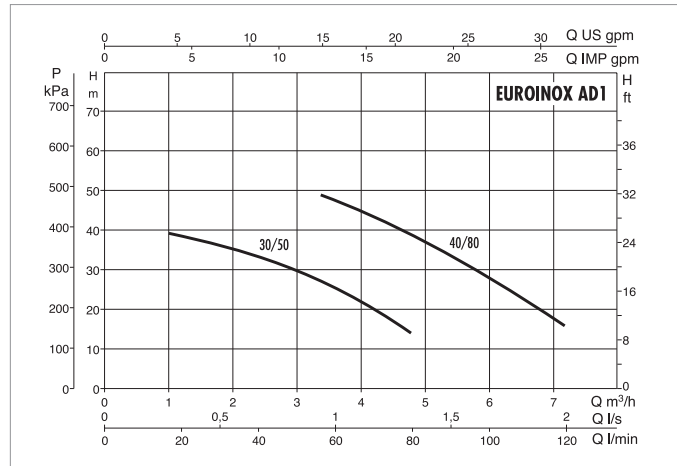

MODEL	ELECTRICAL DATA						
	POWER SUPPLY 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
AD1.0 M/M EUROINOX 30/50M	1x220-240 V ~	0,88	0,55	0,75	3,9	12,5	450
AD1.0 M/M EUROINOX 40/80M	1x220-240 V ~	1,20	0,8	1,1	5,3	25	450

MODEL	A	B	C	E	G	I	H1	H2	DNA GAS	DNM GAS	PACK VOLUME (mc)	GROSS WEIGHT Kg
AD1.0 M/M EUROINOX 30/50M	378	187	95	235	111	9	485	144	1"	1 1/2"	0,54	16,8
AD1.0 M/M EUROINOX 40/80M	452	187	150	235	111	9	485	144	1"	1 1/2"	0,54	21,6